

T-2001 Ceiling Speaker (No-frame Speaker) (2.5W-5W-10W-20W)

Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- 6" +1.5" coaxial speaker unit
- Power output 2.5W, 5W, 10W & 20W @100V
- Metal grille, ABS baffle
- Paint in black color
- Secure flush mount installation

Description

The T-206T is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 6"+1.5" coaxial speaker driver is designed of wide frequency response 70-20KHz, and its various power output from2.5W, 5W, 10W to 20W could meet different room size applications, thus this speaker support both high impedance input and low impedance input use. The metal grille, ABS baffle are painted in attractive black color. Its flush mount type makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

Specification

Model	T-206T
Rated Power (100V)	2.5W, 5W, 10W, 20W
Rated Power(70V)	1.25W, 2.5W, 5W, 10W
Impedance	Black: Com Blue:4ΚΩ Red: 2ΚΩ Green: 1ΚΩ White:
	500Ω
Sensitivity(1W/1M)	92dB
Frequency Response (-10dB)	70-20KHz
Finish	Baffle: ABS, White Grille: Steel, White
Speaker Unit	6.5" x 1 1.5" x 1
Installing hole size	208mm
Dimension	232 x 90mm
Weight	1.3Kg


Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn



T-206T

Ceiling Speaker (No-frame Speaker) (2.5W-5W-10W-20W)

Appearance:

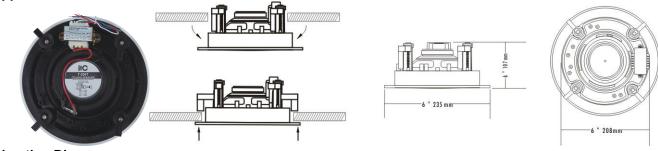

Direction Diagram:



Frequency Response:



Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn

