

Ceiling Speaker (No-frame Speaker) (3.75W-7.5W-15W-30W)

Features

- Built-in 100v/70v transformer
- In-ceiling type loudspeaker
- 8" +1.5" coaxial speaker unit
- Power output 3.75W, 7.5W, 15W & 30W @100V
- Metal grille, ABS baffle
- Paint in black color
- Secure flush mount installation



The T-208T is a ceiling speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.



The built-in 8"+1.5" coaxial speaker driver is designed of wide frequency response 60-20KHz, and its various power output from 3.75W, 7.5W, 15W to 30W could meet different room size applications, thus this speaker support both high impedance input and low impedance input use. The metal grille, ABS baffle are painted in attractive black color. Its flush mount type makes the easy and secure installation.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

Specification

Model	T-208T
Rated Power (100V)	3.75W, 7.5W, 15W, 30W
Rated Power(70V)	1.87W, 3.75W, 7.5W, 15W
Impedance	Black: Com Blue:2.6KΩ Red: 1.3KΩ Green: 670Ω
	White:330Ω
Sensitivity(1W/1M)	94dB
Frequency Response (-10dB)	60-20KHz
Finish	Baffle: ABS, Black Grille: Steel, White
Speaker Unit	8" x 1 1.5" x 1
Installing hole size	248mm
Dimension	282 x 95mm
Weight	1.7Kg


Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn




T-208T

Ceiling Speaker (No-frame Speaker) (3.75W-7.5W-15W-30W)

Appearance:

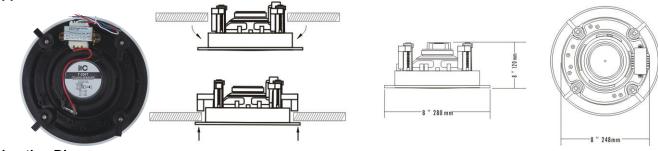

Direction Diagram:

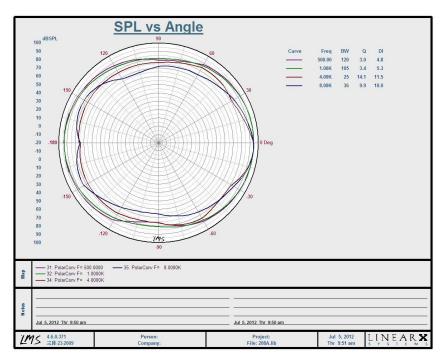

Frequency Response:

