


T-776H 6" Two Way Wall Mount Speaker(5W-10W-20W-40W)

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 6" +1.5" two ways speaker unit
- Power taps 5w-10w-20w-40w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket
- Fashion speaker of black color

Description

The T-776H is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.





The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

Specification

Model	Т-776Н
Power Taps @100V	5W, 10W, 20W, 40W
Power Taps @70V	2.5W, 5W, 10W, 20W, 40W
Transformer Impedance	2ΚΩ/1ΚΩ/500Ω/250Ω/125Ω
Input	70V/100V/8Ω
SPL(1W/1M)	89dB
Max. SPL (Rated W/1M)	105dB
Frequency Response (-10dB)	100-20KHz
Finish	Baffle: ABS, Black/White Grille: Steel, Black/White
Speaker Driver	6" x 1 1.5" x1
Dimensions	340 x220 x225mm
Weight	4.1kg
Mounting	With mounting bracket fixed by screw

Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn




6" Two Way Wall Mount Speaker(5W-10W-20W-40W)

Appearance:



Direction Diagram:

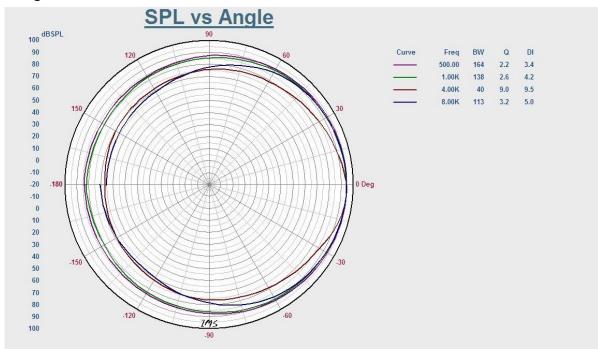

Frequency Response:



Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn